Displaying page layout variables

Kent McPherson a.o.*


1998/06/21

1 Introduction

This LaTeX 2ε package is a reimplementation of `layout.sty` by Kent McPherson. It defines the command `\layout` which produces an overview of the layout of the current document. The command `\layout*` recomputes the values it uses to produce the overview.

The figure on the next page shows the output of the `\layout` command for this document.

*Converted for LaTeX 2ε by Johannes Braams and modified by Hideo Umeki

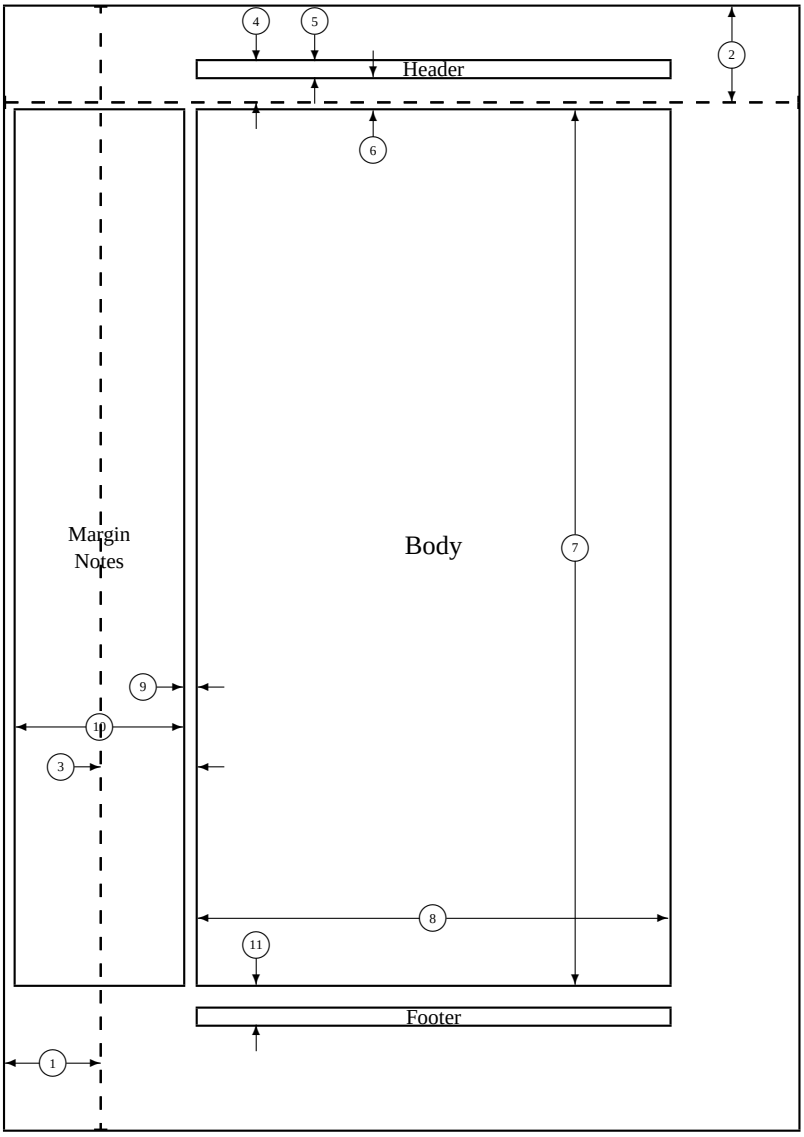

1	one inch + \hoffset	2	one inch + \voffset
3	\oddsidemargin = 73pt	4	\topmargin = -31pt
5	\headheight = 12pt	6	\headsep = 25pt
7	\textheight = 658pt	8	\textwidth = 355pt
9	\marginparsep = 11pt	10	\marginparwidth = 126pt
11	\footskip = 30pt		\marginparpush = 0pt (not shown)
	\hoffset = 0pt		\voffset = 0pt
	\paperwidth = 597pt		\paperheight = 845pt